

# Mounting and charging of Carrier 2 battery

## Battery

### Mounting and dismounting of the battery



Turn the key (ON/OFF) to open position and take the battery out of the rear rack.

Mount the battery again by placing it in the rack and push it into position. Turn the key to locked position and lock the battery.


## Charger

### Installation of charger

Insert the plug of the battery charger into the battery.

You may charge the battery while mounted in the rack of the bike.

You may also choose to dismantle the battery and take it indoor for recharging.

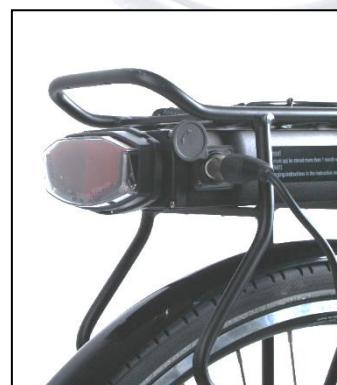

# Mounting and charging of Carrier 2 battery

## Charging procedure

### Description of the charger and charging process

<p><b>1. Charging of the battery mounted on the bicycle.</b></p> <ul style="list-style-type: none"><li>• Turn the key to off position.</li><li>• Put the plug of the charger into the socket of the battery.</li><li>• Put the mains plug (230v) into the power socket and switch on the charger.</li></ul>	
<p><b>2. Charging disconnected battery</b></p> <ul style="list-style-type: none"><li>• Put the plug of the charger into the socket of the battery.</li><li>• Put the mains plug (230v) into the power socket and switch on the charger.</li></ul>	
<p><b>3.</b></p>  <p>Charger diode</p> <p>Power diode</p> <p>Charger Plug</p> <p>Power Plug</p>	
<ul style="list-style-type: none"><li>• Power diode is <b>red</b>, as long as charging takes place.</li><li>• If the charger diode is <b>red</b>, when the power plug is in the socket, there is a lack of battery power. Please charge your battery</li><li>• If the diode is <b>green</b>, the battery is charged.</li><li>• <b>Note</b> Switch off the charger before removing the charging plug</li><li>• After charging, we recommend that the battery must be left plugged in for 24 hours, in order to equilibrate the cells in the battery.</li></ul>	